


Connectors

Standard Multiple Plug

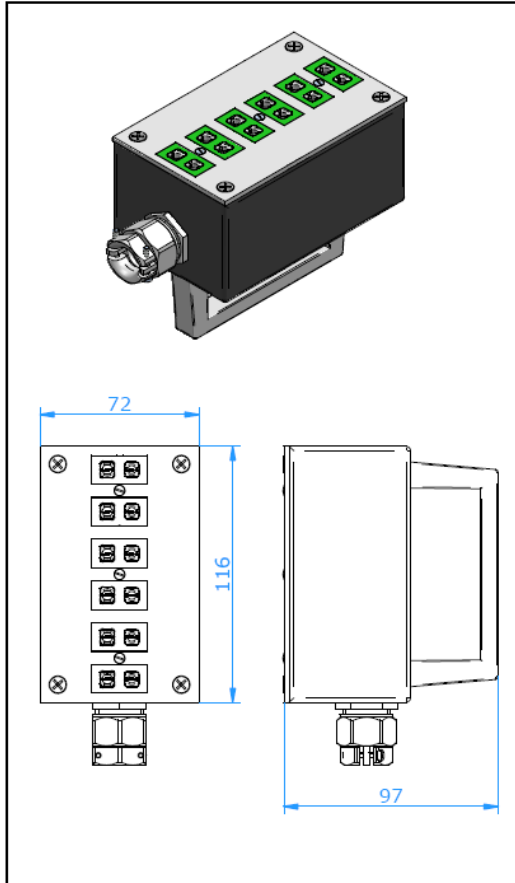

APPLICATION:

Multiple jack for thermocouple and RTD circuits. Suitable for connecting up to 6 standard circuits simultaneously.

CONSTRUCTION:

- Rugged steel epoxy painted housing.
- Anodized aluminium handle for easy grip.
- Available in 1 thru 6 circuits version.
- Incorporates a Hamitherm standard vertical panel PASV

WIRE SIZE:

- Accepts wires from 0,2 mm to 1,5 mm.
- Entrance fitting PG 13 will allow cable diameters up to 15 mm.

TEMPERATURE RATING:

- 200 °C Max.

COLOR CODE:

- Calibration is indicated by color coded dot on front.
- Available in all color code standards.

ORDERING CODE

MJS-y-xx

*y is number of circuits (1, 2, 3, 4, 5, or 6)
For last two digits 'xx' see table below*

Calibration Code	E	J	K	N	T	U	R/S	C	B
Compensation material for							Pt13Rh Pt	W5Re W26Re	Pt6Rh/ Pt30Rh
Material Positive	NiCr	Fe	NiCr	NiCrSi	Cu	Cu	Cu	CPX	Cu
Material Negative	CuNi	CuNi	NiAl	NiSi	CuNi	Cu	Alloy 11	CNX	Cu
IEC Color Code									
Color Body	Violet	Black	Green	Pink	Brown	White	Orange	Red	Grey
Code	EI	JI	KI	NI	TI	UI	RI	C	BI
ANSI Color Code									
Color Body	Violet	Black	Yellow	Orange	Blue	White	Green	Red	Grey
Code	EI	JI	KA	NA	TA	UI	RA	C	BI
DIN Color Code									
Color Body		Blue	Green		Brown		White		Grey
Code		JD	KI		TI		RD		BI