



PSD-2 and PSD-4

Pressure Swing Dryers



A source of clean, dry or super-dry compressed air for humidity calibration systems or as a zero gas for laboratory applications



*PSD-2 and PSD-4
Pressure Swing Dryers*

Features

- Ultra-stable
- Maintenance free
- Modular, self-contained
- Two ranges: 1 ppm, 10 ppb

Method of operation

The air dryers in the Michell range operate on the 'pressure swing' principle. Two desiccant columns are connected to each other in a series-parallel mode. Compressed air is passed through the first desiccant column to remove virtually all the moisture present. A large proportion (typically 85 %) of this dry air is available for the application in question. The remaining 15 % is back-purged through the second, off-line desiccant column to sweep away to atmosphere the moisture it collected during its "on-line" cycle. At a point in the purge cycle, the off-line column is rapidly de-pressurised and this sudden pressure drop causes any moisture adsorbed in the desiccant to be released and purged away. After a pre-set period of time, the function of the two columns is changed over - the first column now being re-generated whilst the second column goes on-line, producing a flow of dry air. One cycle of this operation is represented diagrammatically in Figure 1.

PSD-2

The Michell PSD-2 Pressure Swing Dryer utilises two aluminium columns filled with 4Å molecular sieve desiccant, which are used alternately on an automatically switched two-minute cycle. The PSD-2 dryer operates continuously and desiccant life is normally in excess of five years. The PSD-2 is fitted with inlet and outlet pressure regulation and delivers up to 10 Nlmin⁻¹ of dry air at 1 part per million by volume or better (-75 °C dew point). Outlet pressure is regulated at 10 p.s.i.g. Front panel pressure gauges indicate the operational status of the dryer columns. The PSD-2 requires only mains power, to operate the timer circuit and solenoid valves.

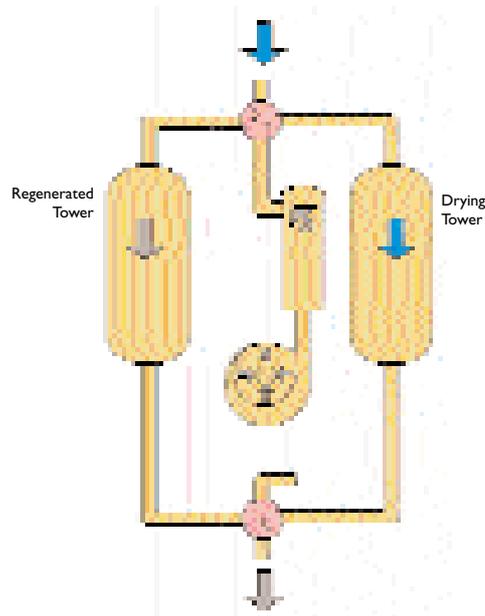


Figure 1: Cycle of a Pressure Swing Dryer



The Dew Point Specialists

Please note: Michell Instruments is continually improving its products and services. Therefore, by the time you read this datasheet, the details contained on it may have been superseded. Please call us to ensure that you have the latest version.

© Michell Instruments 2005



PSD-4

This high performance dryer is constructed entirely from stainless steel with high integrity valves and fittings. The PSD-4 produces an output of better than $-100\text{ }^{\circ}\text{C}$ dew point (less than 13 ppb moisture content) and is suitable for calibration of the latest generation hygrometers, or as a zero reference gas supply for laboratory analysers. The PSD-4 delivers its output at a controlled pressure of 10 p.s.i.g. and can provide a maximum flow of 10 Nlmin^{-1} .

From the Calibration Range

Technical Specifications


PSD-2

Type	Twin column desiccant, pressure swing
Desiccant	4 Angstrom Molecular sieve bead
Timer	Motorised cam
Gauges	Bourdon type
Exhausts	Sintered bronze silencers
Gas inlet	10 Nlmin^{-1} at 70 to 100 p.s.i.g; oil free and liquid water free
Gas outlet outlet pressure	7 Nlmin^{-1} (max) at stp less than 1 ppm_V (= less than $-75\text{ }^{\circ}\text{C}$ dew point); 10 p.s.i.g
Power	100/120 or 220/240 V, 50/60 Hz
Operating temp	+5 to +35 $^{\circ}\text{C}$
Storage temp	-40 to +35 $^{\circ}\text{C}$
Construction	Aluminium case, 19" sub-rack 6U x 350 mm deep
Weight	12.5 kg approx

PSD-4

Type	Twin column desiccant, pressure swing
Desiccant	4 Angstrom Molecular sieve bead
Timer	Motorised cam
Gas ports	Gas inlet - stainless steel 6 mm Swagelok® bulkhead union tube fitting Gas outlet - stainless steel 1/4" Swagelok® bulkhead union VCR fitting
Gas inlet	20 Nlmin^{-1} at 70 to 100 p.s.i.g; oil free and liquid water free (better or equal to $-40\text{ }^{\circ}\text{C}$ dew point)
Gas outlet	10 Nlmin^{-1} (max) at stp less than 13 ppb_V ($-100\text{ }^{\circ}\text{C}$ dew point)
Filter	Millipore Wafergard IIF Micro Inline, sealed type, retention rating of $0.003\text{ }\mu\text{m}$, greater than 99.999 %
Power	220/240 V, 50/60 Hz
Operating temp	+10 to +40 $^{\circ}\text{C}$
Storage temp	-40 to +50 $^{\circ}\text{C}$
Construction	IP66 (NEMA 4) GRP wall mounting enclosure (700 x 500 x 270 mm); all gas wetted components 316 stainless steel
Weight	27 kg approx

Dimensions

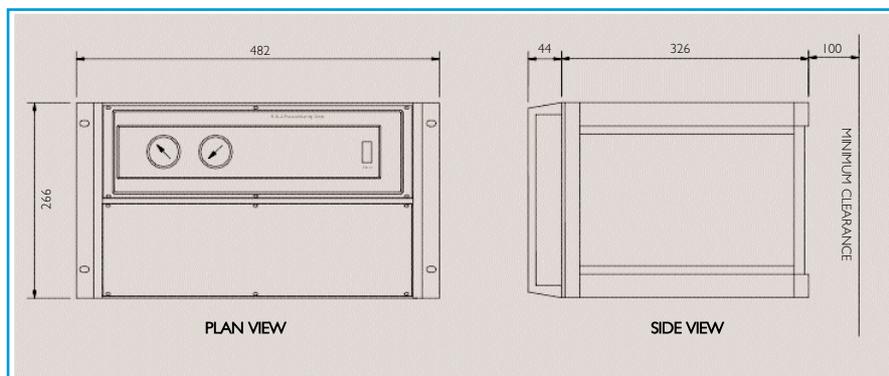

Model shown: PSD-2
Dimensions mm

Pressure Swing Dryers - Ref: PSD-05-01

Michell Instruments Ltd
48 Lancaster Way Business Park
Ely, Cambs, CB6 3NW UK
Tel: +44 (0)1353 658000 Fax: +44 (0)1353 658199
e-mail: info@michell.co.uk
www.michell-instruments.com



Q6284 (UK)



0179 (UK)



MICHELL
Instruments



The Dew Point Specialists